www.steelsourceco.com

CPUC Certified WMBE Firm




Features and Options

- No Splashing while Running.
- Sheltered sampling w/ Streamlined plumbing and formed spout.
- Secure via Hasp lock or Cylinder locking style .
- Door is easy to secure for sanitary environment.
- Compliant with sampling mandates of EPA Total Coliform Rule.
- Inside shelf with bottle stops .
- Powder Coat Super durable polyester grade, up to 4 mils thick

Construction

- Pedestal dimensions 46" over all height.
- Body constructed from a combination of 12ga to 7ga T304L stainless for durability .
- Base: ¹/₂" thick base plate w/bolt pattern.
 Column is 4" schedule 10 pipe.
- Beveled weld prep.
 Welds ground and dressed.
- Std. finish: D.A.



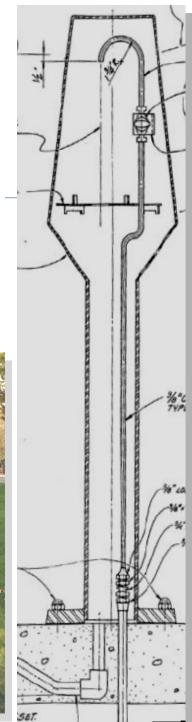

SAFETY FIRST! Safety heights of 3' 10". Quick samples with out squatting or bending.



info@steelsourceco.com